

AQUA UV & AQUA 1K



CLEAR

-  SMOOTH & EVEN SURFACE
-  NATURAL LOOK FINISH
-  LONG LASTING PROTECTION



AQUA UV



AQUA UV was one of Viron's first of many great innovations. Viron was the first to formulate a functioning and effective auto spray-based application system for door coatings back in 2011 and was the first major provider of this technology in Indonesia during early 2018.


Our developments have paved the way for greater efficiencies and a reduction of product waste in the coating industry. Since then, we have provided our customers with a coating system that has consistently outperformed its competitors.

AQUA UV can be recolored to match your preferred wood tone. The product delivers a soft touch, excellent leveling, and superior surface resistance. It's compatible with application using automatic spray machines. Apply one layer at 60–80 gr/m² as a base coat to ensure both efficiency and versatility.

PLUS VALUE



LINE LAYOUT

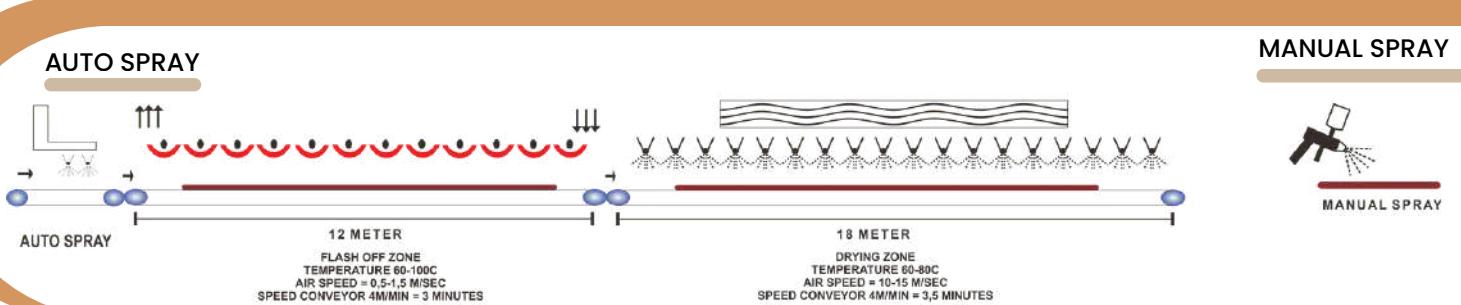

AQUA 1K



AQUA 1K is a water-based, single-component coating formulated with high-quality acrylic resin. Specially designed for flat interior doors and furniture for both indoor and semi-outdoor use, it provides a clear finish that highlights the natural beauty of the material while delivering superior durability, resistance, and surface hardness. The 1K concept offers maximum convenience—ready to use without the need for mixing with additives—ensuring a simple and efficient application process.


AQUA 1K can be applied as a top coat using either automatic spray lines or manual spray. When combined with the Aqua UV System, it delivers a consistent, smooth, and professional finish.

AQUA 1K is available in three sheen levels to meet diverse design needs:

- Invisible (5 units)
- Matte (10 units)
- Satin (15–35 units)



LINE LAYOUT

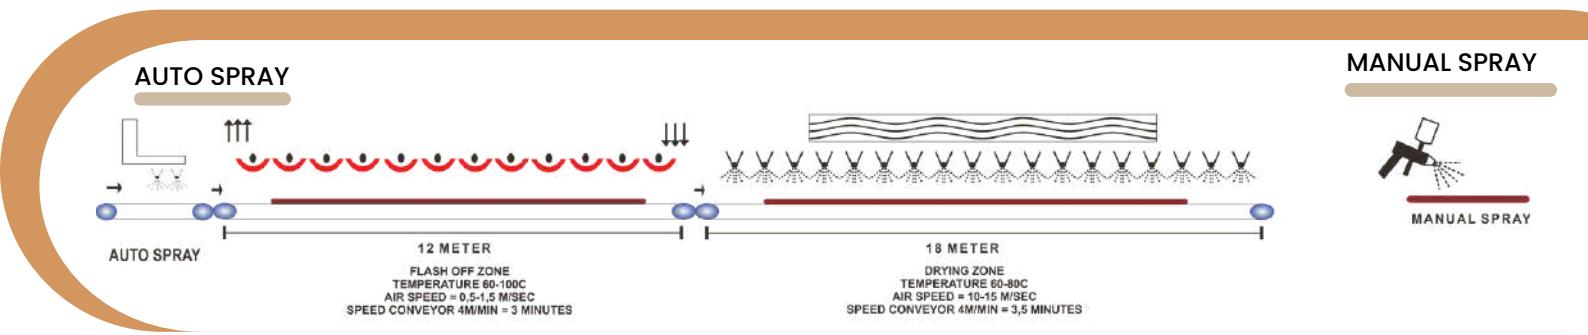

Through our innovative **3R** technology, scratches and chips on **AQUA 1K** treated surface can be easily **REPAIRED**, **RETOUCHED**, or **RECOATED**. It is also applicable via manual spray, allowing for do-it-yourself, on-site repairs.



PRODUCT PERFORMANCE

TYPE	NATURAL LOOK	GOOD ADHESION	SMOOTH SURFACE	NO ODOR	FAST DRYING
AQUA 1K 	★★★★★	★★★★★	★★★★★	★★★★★	★★★★★

APPLICATION PROCESS

01. PREPARATION



Light sanding and clean the surface from any dust and dirt

02. PAINT



Apply one layer of AQUA 1K directly onto the surface using a manual spray gun, with a recommended application rate of 60-80 gr/m² per layer.

03. DRYING



Drying time 1-2 hours.

1L = ± 12 m²

PT. JMW VIRON INDONESIA



Jl. Gatot Subroto Blok 11C, No. 3A,
Kawasan Industri Candi, Semarang, Indonesia



+62 811-8108-990
+62 811-2788-996



application.service@jmw-vironcoatings.com



www.vironcoating.com



www.vironcoating.com